



AEL-B300

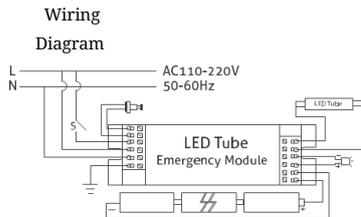



- Compact Design
- Lumen output 140lm
- LifePO4 12.8V 3000mAh
- Working temperature : -5~40

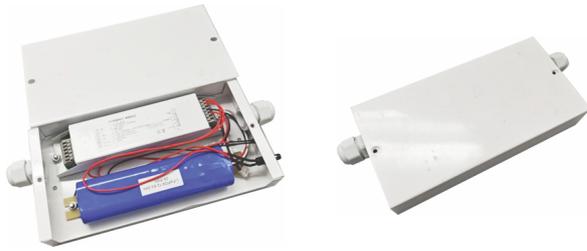

Technical Specifications

MODEL NO	: AEL-B300
Applicable LED Power	: 15W
LED Driver	: Internal
Input Voltage	: 220-240 V AC
Output Voltage	: 220-320V
Operating Temp C	: 25 below 0 to 70
Emergency Time	: 2 hrs
Start- Up Charging Time	: 24 hrs
Brightness Factor	: 100%
Protection Device	: Over-Charge, Discharge and Short Circuit Protection
LED Indicator & Test Switch	: Yes
Modules Lifetime	: 500 charging cycle
Battery Type/Capacity	: LifePO4 12.8V 3000mAh
Dimention (LxWxH) in mm	: 200Lx100Wx33H
Weight (g)	: 750 g
Compliance & Standard	: EN61347-2-13:2006 EN61347-1:2008 A1:1011A2:2013 EN55015:2013 EN61547:2009 EN61000-3-2:2006 A2:2009 EN61000-3-3:2013
Waranty (years)	: 3 years

AEL-B400

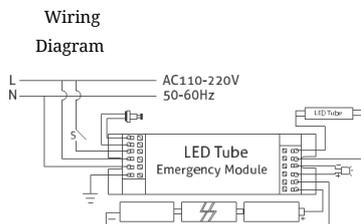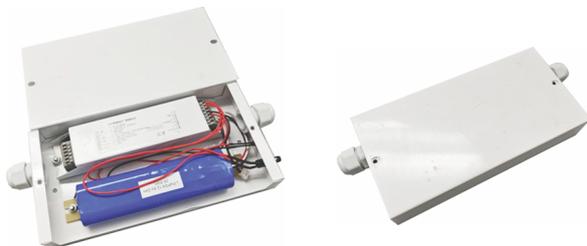

- Compact Design
- Lumen output 140lm
- LifePO4 12.8V 4000mAh
- Working temperature : -5~40



Technical Specifications

MODEL NO	: AEL-B400
Applicable LED Power	: 20W
LED Driver	: Internal
Input Voltage	: 220-240 V AC
Output Voltage	: 220-320V
Operating Temp C	: 25 below 0 to 70
Emergency Time	: 2 hrs
Start- Up Charging Time	: 24 hrs
Brightness Factor	: 100%
Protection Device	: Over-Charge, Discharge and Short Circuit Protection
LED Indicator & Test Switch	: Yes
Modules Lifetime	: 500 charging cycle
Battery Type/Capacity	: LifePO4 12.8V 4000mAh
Dimention (LxWxH) in mm	: 200Lx100Wx33H
Weight (g)	: 820 g
Compliance & Standard	: EN61347-2-13:2006 EN61347-1:2008 A1:1011A2:2013 EN55015:2013 EN61547:2009 EN61000-3-2:2006 A2:2009 EN61000-3-3:2013
Waranty (years)	: 3 years