



AEL-B800

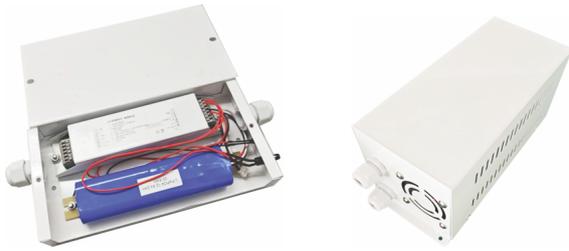

Wiring Diagram

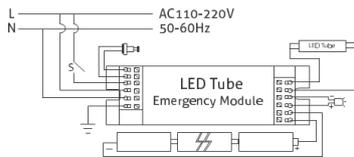

- Compact Design
- Lumen output 140lm
- LifePO4 12.8V 8000mAh
- Working temperature : -5~40




Technical Specifications

| | |
|-----------------------------|--|
| MODEL NO | : AEL-B800 |
| Applicable LED Power | : 40W |
| LED Driver | : Internal |
| Input Voltage | : 220-240 V AC |
| Output Voltage | : 220-320V |
| Operating Temp C | : 25 below 0 to 70 |
| Emergency Time | : 2 hrs |
| Start- Up Charging Time | : 24 hrs |
| Brightness Factor | : 100% |
| Protection Device | : Over-Charge, Discharge and Short Circuit Protection |
| LED Indicator & Test Switch | : Yes |
| Modules Lifetime | : 500 charging cycle |
| Battery Type/Capacity | : LifePO4 12.8V 8000mAh |
| Dimention (LxWxH) in mm | : 330Lx100Wx40H |
| Weight (g) | : 1400 g |
| Compliance & Standard | : EN61347-2-13:2006 EN61347-1:2008 A1:1011A2:2013 EN55015:2013 EN61547:2009 EN61000-3-2:2006 A2:2009 EN61000-3-3:2013 |
| Waranty (years) | : 3 years |

AEL-B1000



Wiring Diagram

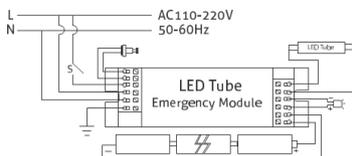

- Compact Design
- Lumen output 140lm
- LifePO4 12.8V 10000mAh
- Working temperature : -5~40



Technical Specifications

| | |
|-----------------------------|--|
| MODEL NO | : AEL-B1000 |
| Applicable LED Power | : 50W |
| LED Driver | : Internal |
| Input Voltage | : 220-240 V AC |
| Output Voltage | : 220-320V |
| Operating Temp C | : 25 below 0 to 70 |
| Emergency Time | : 2 hrs |
| Start- Up Charging Time | : 24 hrs |
| Brightness Factor | : 100% |
| Protection Device | : Over-Charge, Discharge and Short Circuit Protection |
| LED Indicator & Test Switch | : Yes |
| Modules Lifetime | : 500 charging cycle |
| Battery Type/Capacity | : LifePO4 12.8V 10000mAh |
| Dimention (LxWxH) in mm | : 240Lx110Wx115H |
| Weight (g) | : 1800 g |
| Compliance & Standard | : EN61347-2-13:2006 EN61347-1:2008 A1:1011A2:2013 EN55015:2013 EN61547:2009 EN61000-3-2:2006 A2:2009 EN61000-3-3:2013 |
| Waranty (years) | : 3 years |